

# START HERE

Please make sure that the ButtKickers are properly installed in your furniture before continuing. Also, we strongly suggest that you place rubber feet or rubber pads under your furniture's legs or feet.

**MAKE SURE** the BKA1000-4 Power Amplifier has **NOT** been turned on before setting up the BK-QCP.

## 1. BK-QCP Refer to Figure 1

- Plug the a/c adaptor into an electrical outlet. Plug the jack end into the "DC + 12V" on the rear of the "Quick Connect - Quick Select Box." Turn on the Box.
- Turn the dial on the top of the Box to the number of ButtKickers that you have installed. This will illuminate that number of indicator lights on the front of the Box under the label "Output to ButtKickers".
- Using one of the four 12" lengths of supplied speaker wire, connect one ButtKicker to each pair of terminals below an illuminated indicator light. Use terminal #1 for connecting only one ButtKicker, terminal #1 and #2 for connecting two ButtKickers and so on.

## 2. BKA1000-4 Refer to Figure 2

- Plug the amplifier power cord into the power terminal on the back of the amplifier and then into an electrical outlet.
- Using any length of the remaining speaker wire from the BK-QCP kit, connect the ButtKicker Power Amplifier output to the terminal labeled "Input from Amplifier" on the rear of the "Quick Connect - Quick Select Box."
- Make sure the volume control knob (largest knob on the front panel) on the amplifier is turned all the way down (to the left) and then turn the amplifier on.

## 3. BK-LINK Refer to Figure 2 and 3

- Plug one end of one of the supplied RCA audio cables into the ButtKicker Power Amplifier's RCA input. Plug the other end of the cable into the back of the Receive unit ("R7H-BKLINK-R").
- Plug the a/c adaptor into an electrical outlet. Plug the jack end into the back of the Receive unit.

**Note:** Once plugged into an electrical outlet, the BK-Link Send and Receive units are turned on - they do not have separate on / off power switches.

- Plug one end of the second RCA audio cable into the subwoofer output of your A/V processor and the other end into the back of the Send unit ("R7H-BKLINK-S").

**Note:** An RCA "Y" connector or "Speaker Interface Level Adaptor" may be used to enable the use of both a subwoofer and the ButtKicker with your A/V processor or to connect to an A/V processor that does not have an RCA subwoofer output. An RCA "Y" connector and a "Speaker Level Interface Adaptor" cable are part of the BK-QCP package. Use either the "Y" connector or the "Speaker Level Interface Adaptor" but not both.

- Plug the a/c adaptor into an electrical outlet. Plug the jack end into the back of the Send unit.

Figure 1

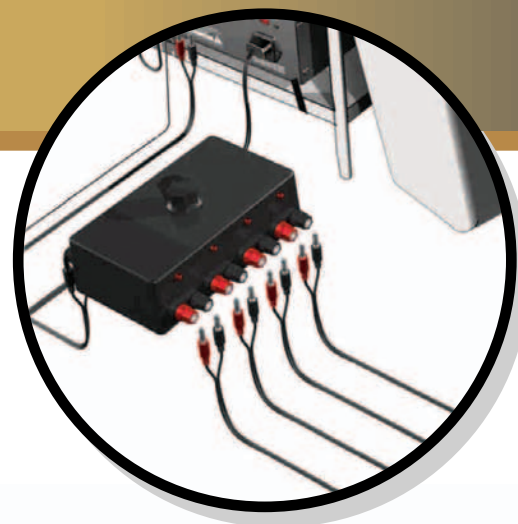


Figure 2



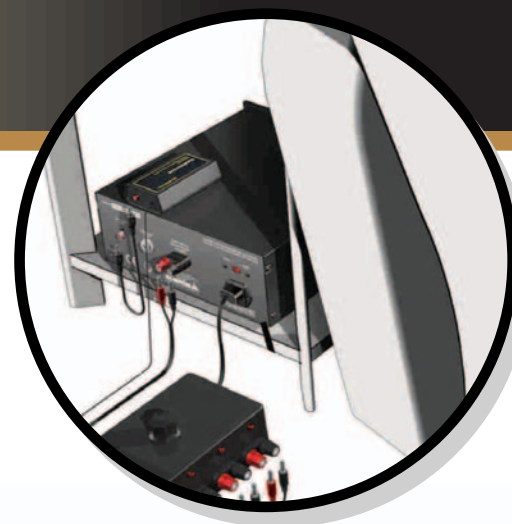


Figure 3

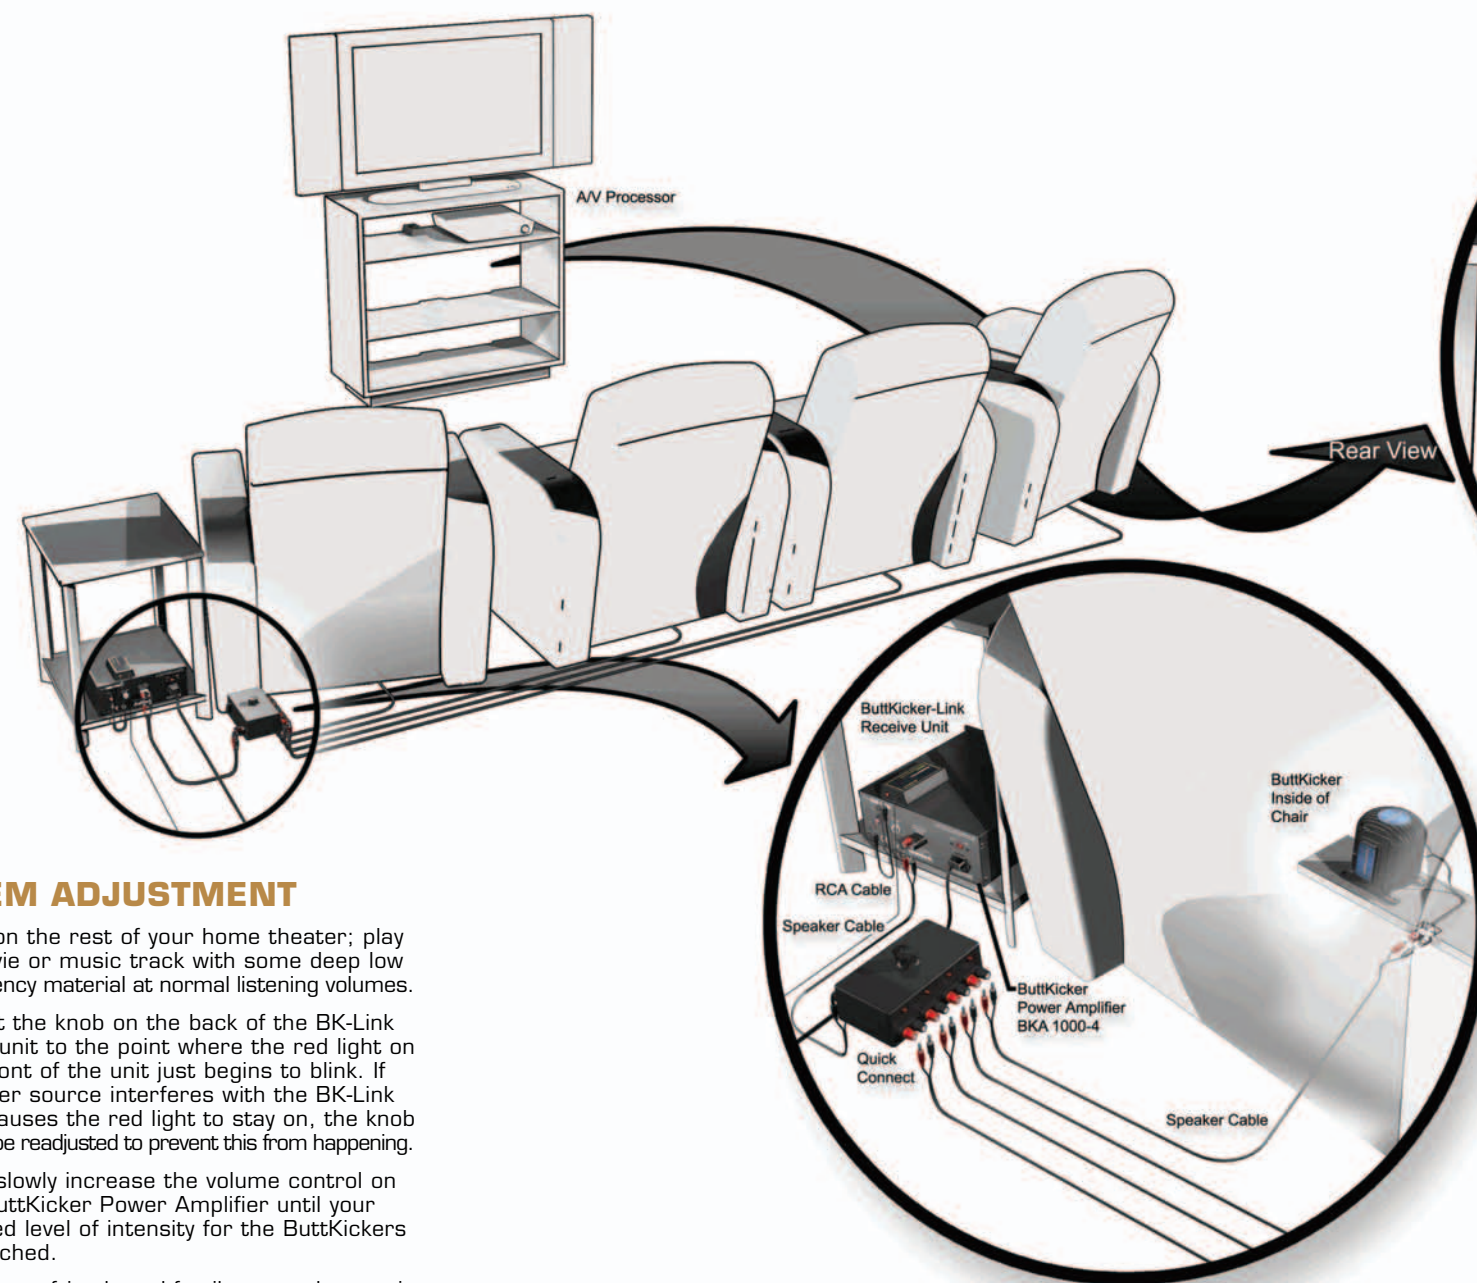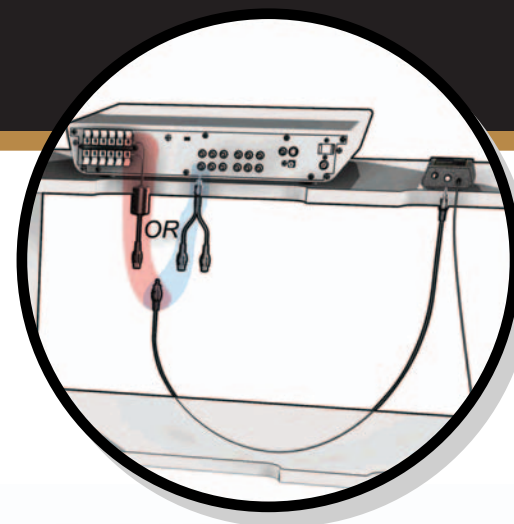

## BUTTKICKER HTSEP STANDARD INSTALLATION

### Optional Installations

Refer to the "Optional Installations" on the reverse side for two other installation configurations.



If you have questions or need technical support, please contact The Guitammer Company, not the store where you purchased the product.

The Guitammer Company Inc.  
1-888-676-2828  
8:30 AM - 5:30 PM EST

Email us at:  
support@guitammer.com

Visit us on the web at:  
www.thebuttkicker.com

## FAQ's

- How should I set the switches and knobs on the front of the ButtKicker Power Amplifier?
  - For most theater setups and applications, turn **off** the low cut-off, turn **on** the high cut-off, and turn the frequency knob to around 80 Hz. Adjust the volume knob to the desired level.
- Where should I put the BK-Link Send and Receive units?
  - The placement of the Send and Receive units is not critical. The units can be up to 50' apart and do not need to have a line of sight between them.
- What does the knob on the back of the BK-Link Send unit do?
  - This knob - called a potentiometer - is used to set the gain below clipping. Should another source cause the red light to stay on, the potentiometer must be readjusted until the light is barely or not at all blinking.
- I have the ButtKicker Power Amplifier turned up all the way, but I want even more intensity! How do I do this?
  - Most A/V processors have an option to increase the output from the subwoofer channel. Turn up this output to get more audio signal to the ButtKicker Power Amplifier. This may require you to turn down the volume of your subwoofer so that it is balanced with the rest of your system.

For more information, refer to the instructions included with each product.

Visit [www.thebuttkicker.com](http://www.thebuttkicker.com) for more FAQ's and details on other ButtKicker products and accessories.



THE GUITAMMER COMPANY INC.  
...leaders in low frequency sound...

**ButtKicker**  
Feel what you've been missing...

